



GENERAL

ALIAEMT ARH950 Series Wall/Duct mount Relative Humidity

Transmitter is the most versatile transmitter in the market. ARH950 combines high accuracy, stability and reliable operation, making these products the ideal choice for demanding applications.

FEATURES

- ❑ Two Line LED (LCD) display, directly read the RH & temperature
- ❑ Accuracy up to +/-2%RH
- ❑ DIP switch selectable signal input of Temperature
- ❑ 4 wire, 4-20mA x 2 for both Humidity & Temperature output
- ❑ Small, light and easy to be installed
- ❑ Full 0 - 100%RH measurement
- ❑ RH 0.1%, Temperature 0.1 °C Resolution
- ❑ 8 seconds fast response time

STANDARD SPECIFICATION

- Measuring Range
 - Relative Humidity : 0 ~ 100%RH
 - Temperature : 0~50 / -20~+80 / -40~+60 °C
- Accuracy
 - Relative Humidity : +/-2%RH @ 25 °C
 - Temperature : +/-0.3 °C @ 25 °C
- Resolution
 - Relative Humidity : 0.1%RH
 - Temperature : 0.1 °C
- Repeatability : +/-0.1% typical
- Humidity Drift : <0.5%RH/Year
- Temperature Drift : <0.1 °C/Year
- Operating Temperature : -20 °C to 70 °C
- Storage Temperature : -10 °C to 60 °C
- Storage Humidity : 0% to 90%RH
- Material
 - Electrical Housing : ABS (Duct) / PC (Wall)
 - Aluminum Alloy (Duct, IP65)
 - Probe : ABS(Duct), S.S.316 (Duct,IP65)
 - Flange : PC (Polycarbonate)
 - Sensor Housing : PC (Polycarbonate)
- Protection Class
 - Duct Mount : IP54 / IP65
 - Wall Mount : IP44
- Display : RH 0.0 ~ 99.9% LED (LCD)
: Temperature +/- 99.9 °C
- Output
 - Relative Humidity : 4-20 mA
 - Temperature : 4-20 mA
 - Load : Rohm=(VDC-12) x 50
- Response Time : 8 seconds
- Turn on Time : 3 Seconds
- Power Supply : 9-36VDC
- Power Consumption : <50mA @24VDC
- Electrical Connections : D Type: PG9, P Type: M20
: Screw Terminal Block (Wall Mount)
- Screw Terminal : 0.5 to 1.5 mm2
- Dimensions
 - Duct Mount : 85mm(L) X 85mm(W) X 241.4mm(H)
 - 100mm(L) X 100mm(W) X 278.4mm(H)
 - Wall Mount : 100mm(L) X 84mm(W) X 23mm(D)
- Weight
 - ARH950-D : 146 g
 - ARH950-W : 83 g
 - ARH950-P : 810 g
- EMI/RFI Effect : Follow SAMA PMC 33.1 from 20 to 1000 MHz and for field strengths up to 30V/m
- Vibration Effect : +/-0.1% of Full Scale Per g to 200Hz in any axis




ALIA GROUP INC.


113 Barksdale Professional Center, Newark, DE 19711, USA
 TEL : + 1 - 302 - 213 - 0106 FAX : + 1 - 302 - 213 - 0107

URL : www.alia-inc.com
 E-mail : alia@alia-inc.com
 ARH950V1.2.0.r1.A4.en

➤ DIMENSIONS

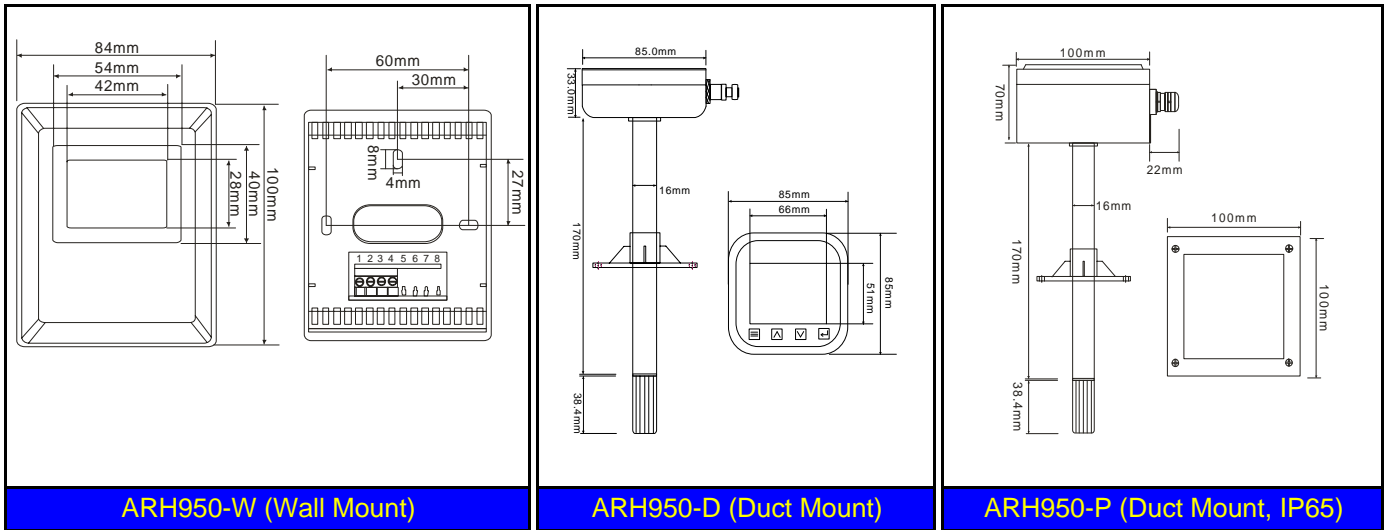

➤ WIRING DIAGRAM

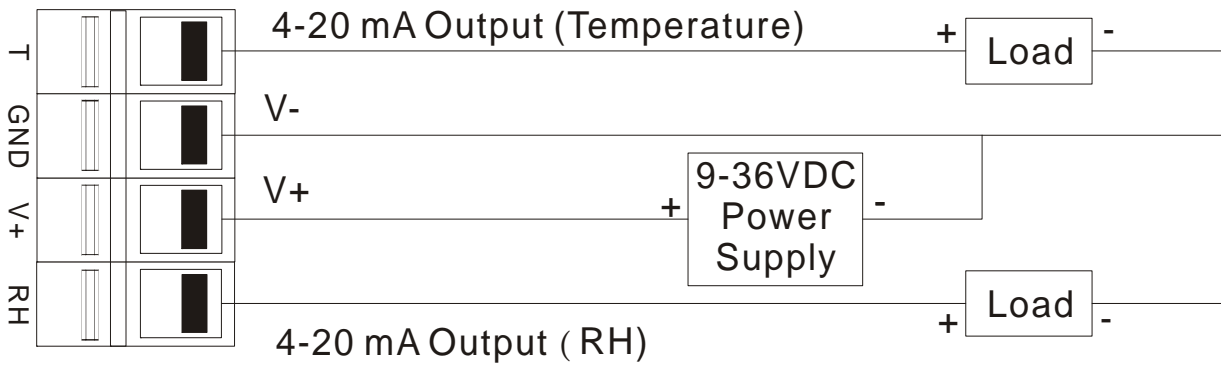

➤ MODEL SELECTION GUIDE

ARH950 Series				
Example: ARH950-DN1-N				
ARH950-	X	X	X	-X
Installation	W	Wall Mount		
	D	Duct Mount		
	P	Duct Mount, IP65, Aluminum Housing, Stainless steel 316 Tube, ** IP65 without Display		
Display	N	None		
	D	Two Line LED (LCD), 3 Digit Temperature, 3 digit Humidity (Only for Installation D & W)		
Temperature Range	1	0 ~ 50 °C		
	2	-20 ~ +80 °C		
	3	-40 ~ +60 °C		
Option	-N	Standard		
	-S	Separate with 10M cable(Only for Installation code:D=Duck Mount)		